

H8822



HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Follow safe electrical work practices. See NFPA 70E in the USA, or applicable local codes.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Read, understand and follow the instructions before installing this product.
- Turn off all power supplying equipment before working on or inside the equipment.
- Use a properly rated voltage sensing device to confirm power is off.
DO NOT DEPEND ON THIS PRODUCT FOR VOLTAGE INDICATION
- Only install this product on insulated conductors.

Failure to follow these instructions will result in death or serious injury.

TABLE OF CONTENTS

<i>Quick Install</i>	1
<i>Configuration</i>	2
<i>Overview</i>	2
<i>Wiring</i>	2
<i>Installation Checklist</i>	3
<i>Hardware Overview</i>	3
<i>Hardware Installation</i>	4
<i>Basic Network Configuration</i>	5
<i>AcquiSuite Administration Overview</i>	7
<i>Security</i>	7
<i>Modbus</i>	8
<i>Networking</i>	12
<i>System Options</i>	16
<i>Diagnostics</i>	17
<i>LCD Console</i>	18
<i>Log File Data</i>	19
<i>Retrieving Data from the AcquiSuite</i>	22

H8822

AcquiSuite DR™ Data Acquisition System

Installer's Specifications

Processors:

Main Processor	ARM 9
I/O Co-Processor	ARM 7
Operating System	Linux
Flash ROM	16 MB NOR Flash (expandable with USB memory device)
Memory	32 MB RAM
LEDs	8x pulse input, 4 modem activity, Modbus TX/RX, power status
LCD	2 x 16 LCD Character, two buttons
LAN	10/100, Auto crossover detection

Modem:

Modem (phone)	V.34 bis, 33,600 bps (Part number H8822)
Modem (cellular)	GSM/GPRS Class 10, 85 kbps (Part number H8822GSM)
Protocols	Modbus/RTU, Modbus/TCP, TCP/IP, PPP, HTTP/HTML, FTP, SNMP, SMTP, XML
Power Supply	24VDC, included
Serial Port	RS-485 Modbus
Power Requirement	120-240VAC
Interval Recording	User selectable 1-60 minutes. Default 15 minute interval
Inputs	8x, user selectable: 0-10V - Min/Max/Ave/Instantaneous; 4-20mA - Min/Max/Ave/Instantaneous; Pulse - Consumption, Rate; Resistance - Min/Max/Ave/Instantaneous; Runtime - Runtime, Status
Approvals	CE; FCC Part 15, Class A
USB Port	USB memory expansion port
Outputs	2x, Dry contact 30VDC, 150mA max.


QUICK INSTALL

1. Mount the AcquiSuite DR on the wall or other appropriate location.
2. Apply power.
3. Configure the IP address for the device.
4. Connect the device to a laptop or other computer.
5. Connect the AcquiSuite to a Modbus device (optional).
6. Configure the AcquiSuite to the local area network (LAN).


OVERVIEW

The AcquiSuite DR™ data acquisition system is designed to allow owners and managers of commercial and industrial facilities with a cost-effective means of gathering crucial information in a timely manner. To meet these requirements, the AcquiSuite DR™ system provides the installer with all the tools necessary to install and configure the hardware and software with a minimum of time and investment.


DIMENSIONS

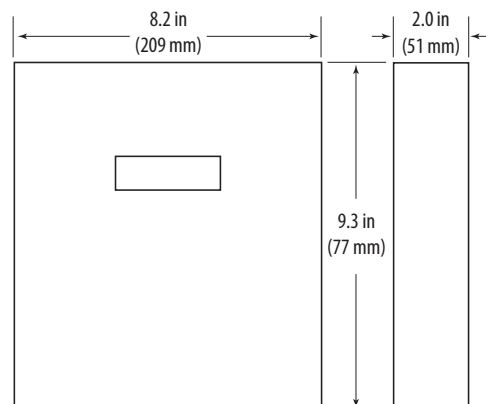

CONFIGURATION

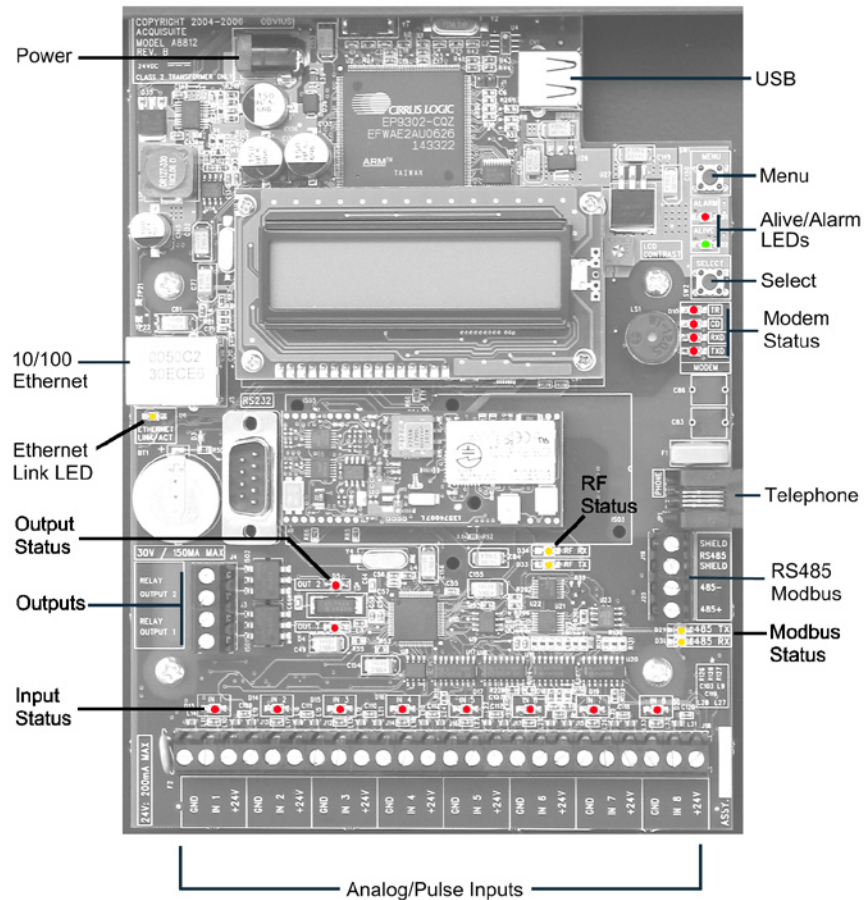

WIRING

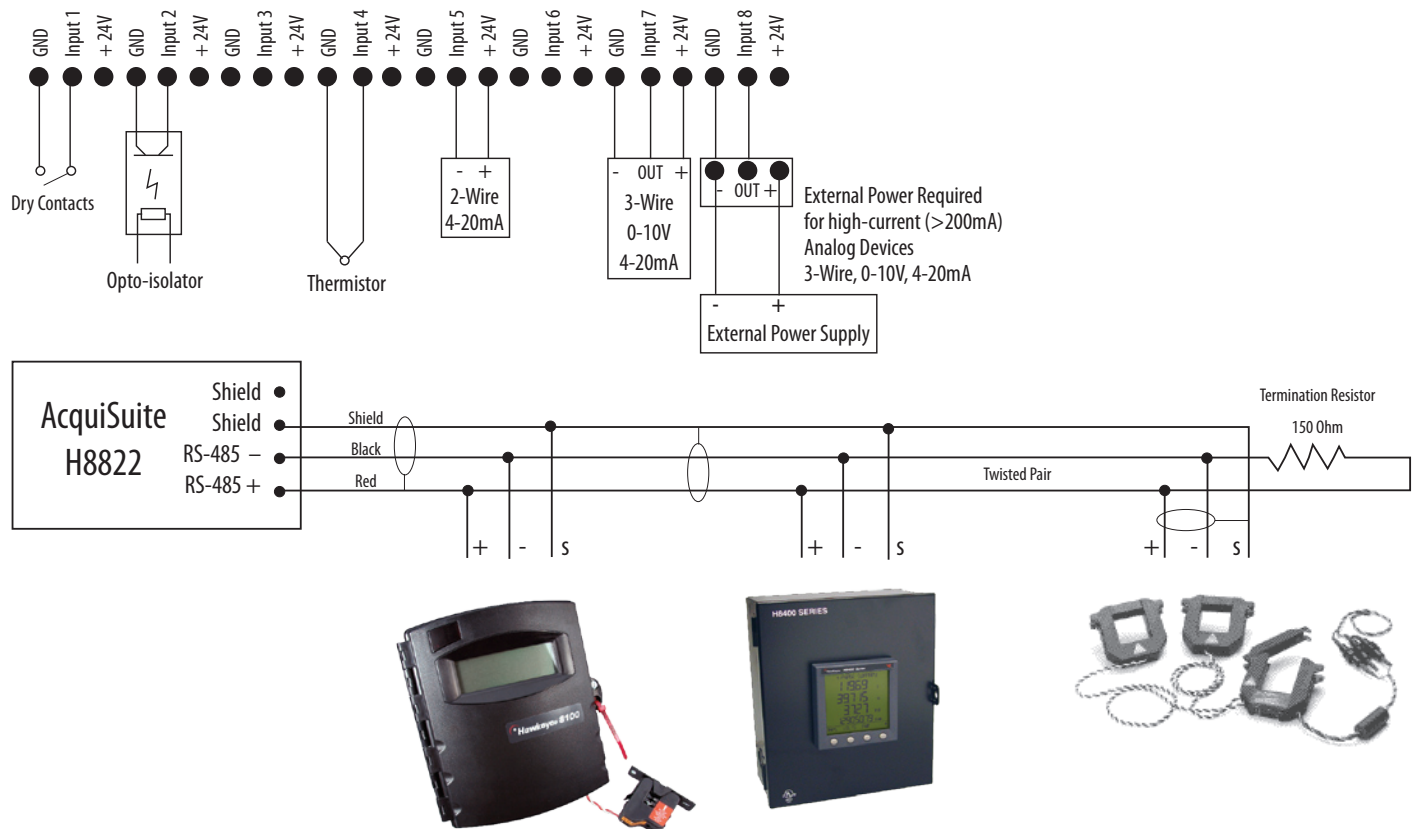

INSTALLATION CHECKLIST

1. Inspect components

Required hardware

- AcquiSuite DR™ H8822-1 server (required)
- Data connection (ethernet or phone line).
- Ethernet Cat 5 standard or crossover cable (required for LAN or direct laptop-to-AcquiSuite DR connection); or
- Phone line and cord (required for modem connection)

Optional hardware

- Analog sensors for temperature, humidity, etc.
- Pulse output transducers for measuring gas, electricity, water, etc. from existing meters and sensors.
- Additional Modbus RTU devices power meters (e.g., Veris Enercept, PML Ion, etc)

2. Choose a connection method

For LAN installations only:

- Ethernet 10/100Mbit connection point (hub or switch)
- IP address and Netmask (check with system administrator)
- Gateway address (check with system administrator)
- DNS server address (check with system administrator)
- HTTP Proxy address (optional), may be required if the AcquiSuite DR is behind a firewall (check with system administrator)

For dialout installations only (AcquiSuite DR initiates a phone call to your ISP or modem server):

- Phone line with dialtone. May be shared with other devices such as a fax machine
- Phone cord for connection to phone system
- Dial out access prefixes, and long distance access code if required. (ie, dial 9 for local line)
- ISP account or Modem Server phone number (check with ISP)
- DNS server address. (check with ISP)
- Time to dial. If phone line is shared, choose a time of day when other devices are not in use
- A regular telephone for line testing and diagnostics

For dialin installations only (AcquiSuite DR receives/answers a phone call from your computer):


- Phone line with dialtone. Must be NOT shared with other devices. (or use appropriate line sharing device)
- Phone cord for connection to phone system
- Telephone number for the phone line that the AcquiSuite DR will be attached to (so you can call the AcquiSuite DR)
- Make note of the AcquiSuite DR dialin IP/Netmask for future use.
- A regular telephone for line testing and diagnostics

HARDWARE OVERVIEW

Processor	Arm9 embedded CPU
Operating system	Linux
Flash memory	16 MB flash
Memory	32 MB RAM
LED	8x input, 4 modem activity, Modbus TX/RX, ppower, system, io status
Console	2 x 16 LCD (passive), two pushbuttons
LAN	RJ45 10/100 Ethernet, full half duplex
Modem	V.34 bis, 33,600 bps
Protocols	Modbus/RTU, Modbus/TCP, TCP/IP, PPP, HTTP/HTML, FTP, NTP, XML
Power requirements	120-240 VAC
Power supply	Included, 24 VDC, Class 2 transformer
Interval recording	User selectable 1-60 minutes; default 15 minute interval
Serial port	RS-485 Modbus, supports up to 32 external devices (expandable)
Inputs	8x inputs with multiple modes: 0-10V/4-20mA (min/max/average/instantaneous data); pulse/dry contact (consumption/rate/runtime/status)
Size	8" x 9.25" x 2.5"

HARDWARE INSTALLATION

1. Unpack materials and verify all required components are available.
2. Mount the AcquiSuite DR on the wall or other appropriate location.
3. (optional) Connect any analog or pulse output sensors you may have. For analog sensors, 0-10V or 4-20mA sensor types are allowed. The combined power consumption of all the analog sensors attached to the AcquiSuite DR must not exceed 200mA. If more current is required, use an external power supply as shown in the wiring diagram shown below.

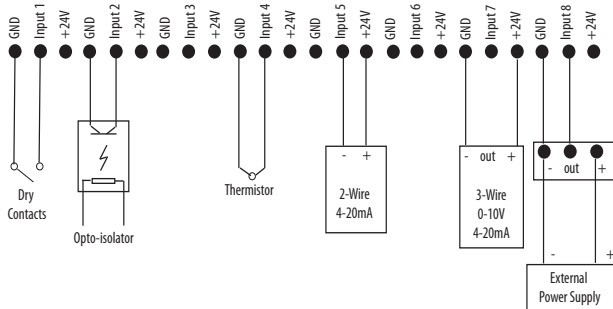

4. (optional) Connect the Modbus network loop as shown in the wiring diagram. Follow the manufacturer's instructions for installing and powering the Modbus devices. Verify that the Modbus address settings are unique for each device (i.e., no two devices with the same address) and power up the device. Connect each device in the chain by "daisy-chaining" the devices together. Observe + and - polarity on the Modbus devices.

Note: Low Voltage analog, pulse, and RS485 wiring that enters electrical panels must have a minimum insulation rating that exceeds the voltage inside the panel. In addition, other regulations may apply; consult the building codes in your area prior to installation.

Note: Some Modbus devices do not use the same label notation as the AcquiSuite DR.

Note: The AcquiSuite DR H8822 internal IO module (analog and pulse inputs) uses Modbus address 250, and will show up in the Modbus device count as a single Modbus device. Additional H8923-4 IO modules may be added to the Modbus loop as needed.

5. Power-up and diagnostics: Attach the power supply to the power input jack on the AcquiSuite DR, and plug the power brick into a wall outlet. The power brick should be in a location that is accessible for connection and disconnection. After power is applied, the green alive light in the upper right of the AcquiSuite DR should come on and the LCD display will display a series of diagnostic screens ending with the following message on the LCD display (this boot sequence may require up to 20 seconds to complete):

AcquiSuite Ready

This indicates that the AcquiSuite DR has loaded properly and is ready for configuration and connection to the network and sensors. If the "power" light does not come on or the LCD display does not cycle to the above screen, verify that the power cord is plugged in. If after cycling the power the unit still does not power up (or if an error message appears in the LCD display) contact technical support. After the H8822 has been powered up for a minute, the yellow RS485 LED should blink slowly once per second during normal operation. Contact closure on pulse inputs will cause the red pulse LED to blink. Verify each pulse input is functioning properly by observing the pulse status LEDs.

- Modbus TX/RX: The Modbus TX and RX LEDs blink to indicate data on the RS485/Modbus loop. The RX LED blinks only when data is received by the AcquiSuite
- Modem RTS: the modem is being monitored or operated by the AcquiSuite DR, off when the modem is idle. This LED will be on when a dialout call is in progress, or when dialin is enabled and waiting for an inbound call.
- Modem CD: the modem has a carrier connection to a remote system.
- Modem TX/RX: data is being sent or received on the modem.
- Alive: blinks once per second while the system is operating correctly.
- Inputs 1-8: in pulse mode, the LED is on when contacts are closed. In analog 4-20mA and 0-10V mode, the LED blinks quickly (2hz) to indicate an input error alarm.

6. Verify connected devices: To verify that the Modbus devices are installed and reporting correctly, use the Modbus status utility on the AcquiSuite DRTM server. To do this test, follow these steps:

A. Press and release the menu (top) button on the AcquiSuite DR. The following will appear on the LCD display:

Main Menu

TCP/IP Config

B. Press the menu (top) button several more times until the LCD display shows the following message:

Main Menu

Modbus Status

C. Press the select (bottom) button on the server and the unit will begin the diagnosis of the Modbus loop. After the check is completed, the unit will display the following message:

X devices OK

X fail, X new

D. Verify that the number of devices located by the server (the total of OK, fail and new) matches the number of devices actually installed and connected. For a first time installation, all devices should appear as "new." The AcquiSuite DR H8822 Internal IO (pulse and analog inputs) appear as one device in this list. (Note: A "device" is the Modbus connected device, not necessarily the sensor. For example, an H8923-4 I/O module with 4 sensors connected is only one modbus device, not four) For further information on the LCD console, please review the console section of this manual.

E. The AcquiSuite DR completes a background scan for new Modbus devices every 2-5 minutes. Increasing the RS485 Modbus timeout may increase the time required to detect new devices. If the Modbus devices are connected after the server is booted up, the devices may not appear on the screen for several minutes. In the worst case, allow up to 5 minutes for the AcquiSuite DR to locate all the connected devices.

F. If all devices are reporting properly, it is now time to connect the server to the network or phone line for remote reporting and configuration.

BASIC NETWORK CONFIGURATION

1. Determine the IP addressing needs: The IP address of the AcquiSuite DR™ server can be implemented using one of three methods. Check with the network administrator to determine which method applies. For phone installations, use “direct connection to laptop” to allow initial configuration.

- Static IP address - this is a fixed IP address which is assigned by a network administrator and “hard-coded” into the AcquiSuite DR; or
- Dynamic Host Configuration Protocol (DHCP) address - this process assigns an IP address dynamically to the AcquiSuite DR when it is connected to the network from a host DHCP server; or
- Direct connection between the AcquiSuite DR and a single temporary computer such as a laptop. (primary connection will be dialin or dialout by modem)
- You will need the following information from your network administrator: The addresses will be in the form of “###.###.###.###”), where “#” refers to the numbers 0 to 9. See the Network Address Worksheet below for more information.

2. Configure the IP address as selected from the table above. For Direct Connection to Laptop, the address settings above are set as the factory default, and you may be able to skip to the “Laptop/Computer Setup” section if the factory default settings are present.

To begin configuration, make sure that the server displays the start screen:

AcquiSuite Ready

If this screen does not appear on the LCD display, press and hold the menu (top) button on the server for several seconds and the message should appear. To change the IP address to the static address assigned by the network administrator, do the following:

A. Press the menu (top) button once to get the TCP/IP configuration menu.

Main Menu

TCP/IP Config

B. Press the select (bottom) button twice to get the IP config menu.

TCP/IP Config

IP Address

C. Press the select button again to see the IP address menu.

IP Address

192.168.40.50

D. At this point, the cursor on the display will be blinking on the first number in the IP address on the second line.

E. To change the number, press the menu (top) button and the display will cycle through the digits 0-9 as well as “.”. Once the correct digit is displayed, press the select (lower) button to advance to the next digit and repeat the process until all the digits are correct.

F. Once the IP address on the server matches the assigned IP address, press the select (bottom) button once more to return to the main TCP/IP menu.

3. Set the Netmask, gateway, and DNS server(s) addresses as noted in the chart “Network Address Worksheet” using the same technique as shown above. The only change is that after Step B, press the menu (top) button multiple times to see the netmask, gateway, and dns setup menu, then push the select button to set the option.

Note: If DHCP configuration is selected, the IP, netmask, gateway, and dns server addresses will be obtained automatically. Simply select the “Enable DHCP” from the first TCP/IP configuration manu.

4. After the address information has been set, you must reboot the AcquiSuite DR. Select the “(Previous Menu)” option after step B above. The menu will then state that the AcquiSuite DR must be rebooted to take effect. Press ‘select’ to allow the AcquiSuite DR to reboot. Once the AcquiSuite DR has rebooted, the new IP address will be displayed on the console. If DHCP addressing was specified, the server assigned address will be displayed.

Note: if DHCP is unable to obtain an ip address, the AcquiSuite DR will use the fallback address of 192.168.0.100.


Network Address Worksheet:

Static IP Address	DHCP	Direct Connection to Laptop
IP address: _____._____._____.	proxy server port: _____	IP Address: 192.168.40.50
Netmask: _____._____._____.	IP address: (dhcp assigned)	Netmask: 255.255.255.0
Gateway: _____._____._____.	Netmask: (dhcp assigned)	Gatway: 192.168.40.1
DNS server: _____._____._____.	Gateway: (dhcp assigned)	DNS: 198.107.56.37
DNS server: _____._____._____.	DNS server: (dhcp assigned)	HTTP Proxy: [blank]
HTTP Proxy _____	HTTP Proxy _____	(factory default settings)
proxy server port: _____	proxy server port: _____	Network Address Worksheet

Laptop/Computer Setup

1. You must have a computer to access and configure the AcquiSuite DR. This computer must have an ethernet connection (on the LAN or by direct connection) and must have a web browser installed such as Internet Explorer or Netscape.

Note: If your building already has an existing LAN that the AcquiSuite DR is attached to, you can use an existing computer on that LAN. Check with your network administrator for details. If this option is available, use a LAN connected computer and skip to the "AcquiSuite DR administration overview" section below.

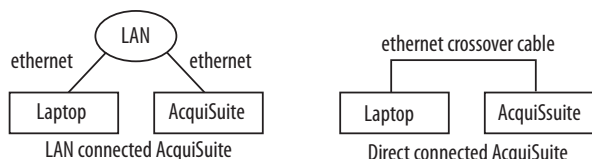

The remainder of this section will assume the installer has brought a laptop to the site, and will connect the laptop to the building LAN, or directly to the AcquiSuite DR. Attach the laptop to the AcquiSuite DR or LAN as shown.

2. Attach the laptop to the AcquiSuite DR or to the LAN. If the laptop is to be attached to an existing LAN, use a standard (direct) ethernet patch cable. If the laptop is to be attached directly to the AcquiSuite DR use an ethernet "Crossover" cable. If the laptop is to be attached to an existing LAN, obtain a static IP address (or use DHCP addressing) from the network administrator.
3. Configure the laptop IP address using the following steps.

Note: Only MS Windows is detailed below, however you can use any OS/ Browser you wish such as MacOS or Linux. Details on network setup for non-windows operating systems is beyond the scope of this document however.

- A. From the Windows start menu, select the "Settings", "Control Panel" option. Double click the network icon in the displayed window.

Note: If you are using Windows 2000 or Windows XP, select the 'Local Area' connection icon in the network folder, then click the "Properties" button.

- B. In the network setup dialog, there should be a list of items including adapters, clients and protocols. Locate the protocol labeled "TCP/IP".

Note: If you have multiple ethernet cards, you may have multiple lines labeled "TCP/IP --> ethernet card". Locate the ethernet card that corresponds to the physical connection to the AcquiSuite DR and then select the TCP/IP option that is linked with that ethernet card.

- C. Double click the TCP/IP option you selected in step B above. An example screen is shown. Set the IP and Netmask from the laptop Address Worksheet above. It would be helpful to make note of your previous settings in this dialog so you may set them back after you are done with the AcquiSuite DR Configuration.

- D. Close the TCP/IP settings dialog, and Network dialog. If you are using Windows 95, 98, or ME, you will be required to reboot your computer.

- E. Close the TCP/IP Settings dialog and Network dialog.

Laptop Address Worksheet:

Static IP Address	DHCP	Direct Connection to Laptop
IP address: _____._____._____._____	Obtain IP address automatically	IP Address: 192.168.40.1
Netmask: _____._____._____._____	IP address: (dhcp assigned)	Netmask: 255.255.255.0

ACQUISUITE ADMINISTRATION OVERVIEW

The AcquiSuite DR should now be available on the local area network for you to access using a web browser such as Internet Explorer or Netscape.

1. Use your web browser to connect to the AcquiSuite DR by entering `http://192.168.40.50/setup/` where 192.168.40.50 is the IP address displayed on the on the AcquiSuite DR LCD display.
2. When prompted, use the following default login information
Login: admin
Password: admin
3. Your web browser should now display the AcquiSuite DR configuration menu. To the left, a list of configuration options are available. On the right, a specific configuration page will be shown. The first page is a welcome message with some system status information. Proceed with the configuration of the AcquiSuite DR using your web browser.
4. Click on the + mark next to the Accounts menu. Select the Admin account, and click 'Change Password'. All units are shipped with the same factory default password, and it should be changed to prevent unwanted access.
5. Expand the Networking option, and select setup. Verify the addresses are consistent with those in the "Network Address Worksheet."
6. Expand the Modbus option, and select "Device List." You should see a list of each Modbus device attached to the AcquiSuite DR. Before the AcquiSuite DR can begin logging data, each Modbus device must be assigned a unique name.
 - A. Click the device number to the left of the unconfigured Modbus device.
 - B. A page with the current device status and readings will be displayed. Click on the 'configure' button at the bottom of the page.
 - C. Enter a name for the device in the supplied field.
 - D. Change any low and high range alarm settings you may need. (optional)
 - E. Click the 'Save' button at the bottom of the page to save your changes.
 - F. Repeat these steps for each Modbus device.

Some devices may require additional information. The H8238 Multi circuit power meter allows the CT size to be specified. The H8923-4 IO Module and the H8822 AcquiSuite DR internal IO module have additional configuration options on each data point line to specify the details of the analog or pulse input. These include the 4-20mA device scale, multipliers and engineering units. Each 4-20mA or 0-10V sensor should be supplied with technical information including the low and high range values that can be used to configure the AcquiSuite DR. Also, the AcquiSuite DR has many common sensor types pre-programmed that can be selected from a drop down list. Review the Modbus Advanced Configuration Options section of this manual for further configuration details.

7. Select the Modbus/Setup menu option. Specify the Modbus Loop Name. This will become the name of the AcquiSuite DR. This is the name that will appear on the BMO website service (if subscribed). Specify the data logging period. The default is 15 minutes.

8. Decide upon a method of data transfer. (see section later in this document) If you select the HTTP/Post method to send data to the BMO website, you can configure this by selecting the "LogFileData, Setup/Upload" page.

- A. Make note of the AcquiSuite DR serial number.
- B. Select upload options as needed for time of day to upload the data and retry control.
- C. Check the checkbox to allow remote configuration. This will allow you to reconfigure the AcquiSuite DR from the BMO web site without having to connect directly to the AcquiSuite DR.
- D. Specify the "Target address to upload data." This is the website address where the AcquiSuite DR will send the collected data. If you have an in-house data collection service, you should enter the address of your data server in this field. If you are using BMO service, the target address to upload data should be set to `http://www.buildingmanageronline.com/upload.php`
- E. When configuring the AcquiSuite DR to send data to the BMO site or your own data collection server, the AcquiSuite DR will authenticate itself with the server by using the serial number and a password. This password must be supplied here, and can be obtained when you subscribe for the BMO service, or by your database administrator.
- F. Click "Apply" to save your changes.

If you select a manual transfer method, remove (blank out) the target address in the Modbus/Upload Data page.

SECURITY

The AcquiSuite DR has three levels of security. These are "operator," "user," and "admin." When using a browser to access the AcquiSuite DR, basic http authentication is used to prompt your browser for a username and password. The admin account uses "admin" as the default password. To change the password, select the Accounts menu from the left side tree display. Next, select the account name. Click the "Change Password" button to set a new password for the selected account.

admin: This account has full access to modify any of the system settings. The default password is "admin."

operator: This account may view settings, however may only change modbus alarm ranges and device names.

user: This account can view some system settings including the modbus device status pages and can change nothing.

When using FTP to access the AcquiSuite DR, you may use the admin account username/password for read-only access. Log information is stored in `/var/log/Modbus`. For read-write-delete access, use the login name "root" and the admin password.

The three usernames specified are not able to be changed or renamed, nor can arbitrary usernames be added to the AcquiSuite DR. Access is only controlled by setting the password for the three existing usernames noted above.


The "operator" and "user" accounts are disabled by default. These accounts are activated when you first set a password for each.

MODBUS

Modbus Device List

The AcquiSuite DR automatically searches for Modbus devices on the RS-485 serial loop. The Modbus Device List page will show a listing of all the currently detected or configured devices the AcquiSuite DR has found. The device list will show the Modbus address number, status (OK, Error, Alarm, Unconfigured), the device name (user specified), and the device identification string.

Click on the Modbus address number for any of the devices for specific device details.

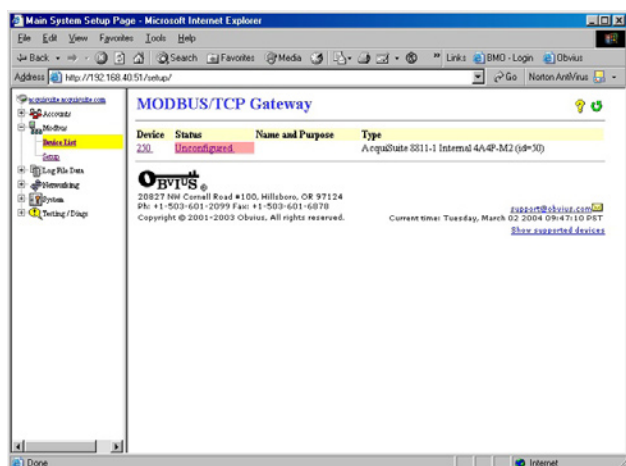

Note: not all Modbus devices are supported by the AcquiSuite DR. If a device appears in the list with "Unsupported" in the status column, you may need to upgrade the firmware on the AcquiSuite DR to access the device. At the bottom right corner of the device list page, a link is shown that will enumerate all the supported Modbus devices in the installed version of the firmware. Use the System/Firmware update page to check for newer versions of the firmware. The Veris.com website faq also has a list of supported Modbus devices.

Device Details

The Device Detail page will show a list of all the meter data points, alarm settings and console options. The data point names for most devices are automatically entered. Some devices such as the H8923-4 IO module have generic inputs, and will be labeled as "pulse input #1". At the top of the page, the status of the device is shown. This usually reports "ok" however it can include error information if the device is not responding properly. A list of device errors is available in the log file details section of this manual. At the bottom of the page, several buttons are present.

Done: returns you to the device list page.

Log File: will display a tabular view of the most recent data in the current log file. Use the log file export page for complete log data access.

Configure: This button will allow you to change the device parameters such as the name, alarm and console settings.

Device Configuration

Clicking the "Configure" button from the Device Details page will refresh the screen with the same information, however the device name, alarm settings and console checkbox will be available.

Device Name: This field allows you to specify a name for the device such as "main building power" or other useful name to indicate the location or function of the device. A name must be assigned to a device before the AcquiSuite DR will log data for it.

Low Alarm, High Alarm: Specify a threshold for the alarm. If the data point is recorded below the Low Alarm, or above the High Alarm levels at the time a log entry is taken, the point will be considered in an alarm state.

Console: Checking this checkbox will cause the AcquiSuite DR to display this data point on the LCD console. Multiple data points are rotated about every 10 seconds. The values on the LCD console are updated when the next log interval occurs.

Point Config: Some devices have configurable point features. The H8923-4 IO module has 4 pulse and 4 analog inputs that require additional configuration as detailed in the next section. The H663/704 BCM product only requires the circuit breaker name in this menu. Most device points are automatically configured, and this option may not be displayed.

Advanced: At the lower right corner of the page, an advanced configuration button may be present depending on the Modbus device features.


Advanced Configuration Options

The advanced configuration page contains special options specific to the device you are configuring. For the H8923-4 IO module, you may specify the pulse rate speed that the pulse inputs will work at, as well as review the 4-20mA/0-10V input status. On power meters, the CT size and orientation options may be present. The device serial number and other specific parameters will be displayed if available.


Internal IO Configuration

The H8822 AcquiSuite DR provides 8 multipurpose inputs on board. The onboard IO inputs will always be device 250 in the device list.

1. Click on the device number 250 in the device list. A page showing the device inputs will be presented. Each input has 5 lines on this page. Analog inputs have one line each for an instantaneous, min, max and average value. Pulse inputs have a line for the accumulated value, rate, runtime and status.

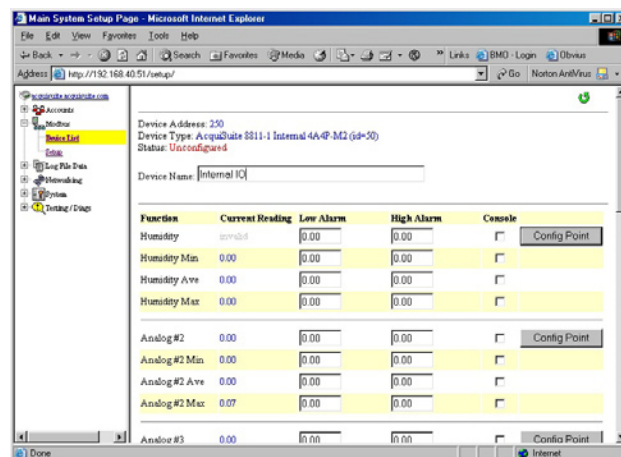

- Click the Configure button at the bottom of the page. The page will be displayed again, however the device name and alarm level fields will allow editing. Type in a name for the device in the space provided at the top of the page. The name should describe the purpose or location of the IO module. For device 250, you may want to use the name "internal IO"
- For each input that you wish to use, click the "Config Point" button to the right of the input.

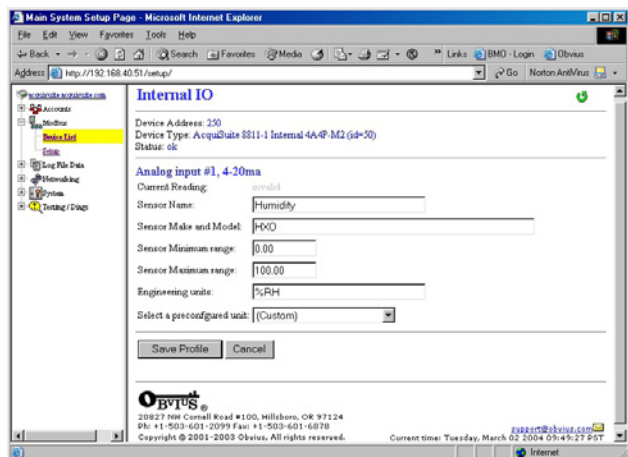

- The analog input configuration requires several options. The input mode will control how the input functions. This includes measuring voltage, current, resistance, pulse, or runtime. Use the dropdown menu to select the mode that is appropriate for your sensor. The input configuration must be completed for each input that is in use.

Sensor Name: Change this to describe the input. This can be anything you wish, such as "Indoor Temperature."

Input Mode: Select from one of the following: Voltage 0-10V, Current 4-20 mA, Resistance, Pulse, or Unconfigured.

Sensor Make and Model: This entry is a space for the model number of the sensor. It is only used for reference.

Sensor Minimum Range: All analog sensors have min/max range values. For example, a temperature sensor may have a range of 50 to 95 degrees F. Enter the low range number here.


Sensor Maximum Range: Enter the high range value of the analog sensor here.

Pulse Multiplier: For pulse mode inputs, this option specifies the multiplier for the input.

Pulse Rate: For most units, this feature is an automatic rate field. For KWH points, the rate is KW.

Engineering Units: Enter the units of measure, i.e., degrees F, %RH, etc.

- After saving the sensor profile, the device configuration page will appear again. The input values should now be scaled correctly and the names will be updated to your new configuration. You may wish to set any alarm thresholds required or check the "Console" checkbox for any data points that should be displayed on the LCD console.

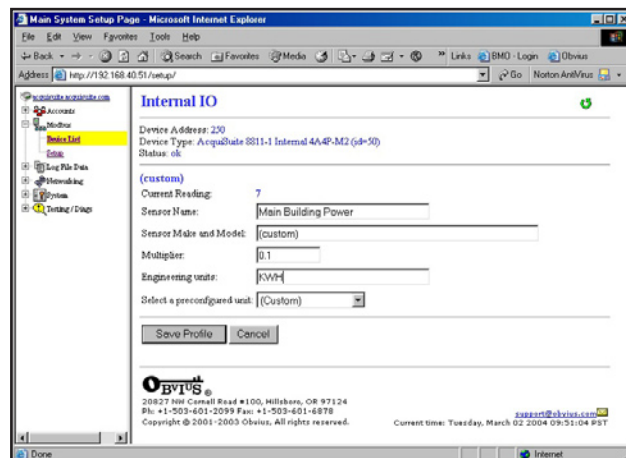

- Click the "Advanced" button in the lower right corner of the page. For the H8822 onboard IO, there are several options.
- After returning to the device configuration page, click "Save" at the bottom of the page to return to the device display.

Troubleshooting Modbus Devices

If the device you have attached does not appear in the Modbus device list, check the following:

- Verify the + (red), - (black), and Shield connections are correct on all connections. Look for any connection in the middle of the loop that may have the wires reversed, or shorted together.
- Verify the address settings of every Modbus device. No two devices may have the same address. Note: the AcquiSuite DR H8822 uses the address 250 for the internal IO module. Do not assign this address to any other Modbus device.
- If only one device is not working, try disconnecting all the other devices on the Modbus loop to isolate the problem. If possible, bring the failed device adjacent to the AcquiSuite DR and attach it with a short stub of wire to eliminate possible wiring problems. If the AcquiSuite DR can find a device on the short stub, the problem is probably a wiring related issue on the RS-485 loop.
- Check to verify the Modbus device is supported by the AcquiSuite DR. Usually, the AcquiSuite DR will locate the device and print "Unsupported" in the device status column if the device is not recognized by the AcquiSuite DR firmware drivers. In the lower right corner of this screen, there is a link that will show a list of supported devices. Use this to verify the Modbus device in question is supported by the AcquiSuite DR firmware version. If not, check for firmware upgrades online with the Firmware Update configuration page.

- Remember, the AcquiSuite DR may take between 2 and 5 minutes to detect a new device that has been attached to the Modbus RS-485 loop. Rebooting the AcquiSuite DR, refreshing the device list page, or using the console 'Modbus status' menu will not speed up the recognition process.
- Click the "Troubleshooting" link at the bottom of the Modbus device list page for further diagnostics.

Modbus Setup

The Modbus setup page provides several options related to the Modbus RS-485 serial port.

Loop name: This is the name of the AcquiSuite DR. This name will be present on all log file descriptors when uploaded to a central database website such as BMO. It is helpful to name the AcquiSuite DR based on the physical location of the system, or building.

Data logging period: This option sets the log interval for the AcquiSuite DR. Options range from once per minute to once per hour. All of the selections are evenly divisible by one hour. The AcquiSuite DR calculates the next log time by finding the next multiple of the log period past the start of the hour. For example, if the log period is 15 minutes, log readings will be taken at 0, 15, 30 and 45 minutes past the hour. The log period is not calculated based on "15 minutes after the last reading." When the AcquiSuite DR is first started, it will take an initial reading immediately. The next log reading will be calculated as a multiple of the log period after the hour. The initial reading is taken to allow the AcquiSuite DR to gather information for meters that require demand calculations, as well as provide accurate information starting when the AcquiSuite DR is booted.

Modbus/TCP access: The AcquiSuite DR has a Modbus TCP gateway feature that allows other systems to send queries to all attached Modbus RS-485 devices. This feature allows control of what systems may query the Modbus TCP gateway. The settings include "no access", "local subnet only" and "allow any". This basic security feature only allows control based on the IP address of the system making the request. The Modbus TCP protocol does not have provisions for any authentication password or other methods of security. By default, the gateway feature is disabled, and set to "No Access."

The Modbus TCP gateway is a feature that allows the AcquiSuite DR to share the attached Modbus RS-485 devices with other systems such as PCs with software and building control systems. The gateway receives incoming TCP requests, verifies the length of the packet does not exceed 255 bytes, and forwards the packet to the Modbus RS485 loop. The gateway does not verify the contents of the packet, nor the target address specified in the request. If the Modbus RS-485 device sends a valid response back, the gateway will return this information to the the system requesting it via TCP. If no response is received, a timeout failure will be sent to the requester. Because the gateway does not process the contents of the request or reply, it is possible to query devices on the Modbus RS-485 loop that are not specifically supported by the AcquiSuite DR.

Modbus RS-485 baud rate: This feature allows the configuration of the RS485 serial port speed which the AcquiSuite DR uses to communicate with Modbus devices. Options include 9600, 19200, and Opportunistic/Multi-speed. The default is 9600, most Modbus devices communicate at this speed as well. In Opportunistic mode, the AcquiSuite DR will automatically detect the baud rate of each Modbus device, and will continue to communicate

with that specific device at the detected speed. This feature will allow you to mix multiple devices on the same RS-485 loop with different baud rates. Modbus devices must be configured at baud rates of 9600 or 19200, other baud rates are not supported. Note: Modbus device manufacturers usually do not 'officially' support this configuration, however we have not seen any problems with this in any of the modbus devices we provide drivers for. If you are experiencing Modbus communications problems, set the baud rate to a fixed 9600 before troubleshooting.

Modbus Parity: This feature allows alternate parity options to be set. Default is no parity.

Modbus Stopbit: This feature allows alternate stop bit options to be set. Default is one stop bit.

Search for Acromag Devices: This feature allows Mcromag brand devices to be detected with alternate serial port settings of 8 data bits, even parity and one stop bit. Leave this feature disabled unless you have Acromag brand modbus devices attached to the 485 chain.

Modbus Debug: This feature records Modbus transaction data in the system debug log file. Click the "start log" button on the system/log files page to record this information.

Modbus RS-485 timeout: This feature sets the period of time the AcquiSuite DR will wait for a response from any device on the Modbus RS-485 serial loop. The default of 200ms is long enough for most Modbus devices. Longer timeouts may be required if you have a very slow device, or if you have a Modbus repeater device in the serial loop. Devices such as the Veris H8936 Local Display, and RS-485 wireless link repeaters provide access to downstream Modbus devices with a substantial delay. Setting the delay longer than the default will increase the time required to auto-detect new Modbus devices when attached to the AcquiSuite DR. The allowed range is 100 ms to 5 seconds.

Alarm Setup

The Modbus Alarms section provides the ability to send messages when alarm levels are exceeded. Messages can be sent by email, snmp, or displayed on the LCD console. Alarms are processed at the end of the data logging period. For more frequent alarms, shorten the data log interval. Log readings and alarm processing can be set to as often as once per minute.

Display all alarms on LCD console: When checked, all alarm messages are shown on the LCD display of the AcquiSuite.

SNMP Trap Send Enabled: When checked, SNMP Trap messages are sent after every log period for each data point that is in an alarm state. The trap includes information about the AcquiSuite system data point and alarm state. A full MIB is located on the AcquiSuite, click the MIB link to the right of this option.

SNMP Trap Host 1 (2,3): When SNMP traps are enabled, a trap message is sent to each of the trap host addresses. Specify the trap host by IP address, not DNS name.

Direct email on alarm: When checked, the AcquiSuite will send an email message when any data point changes its alarm state.

SMTP Mail Server Address: The IP address of the email server on the LAN that will process and forward the email message to the recipient.

Sender address: The address that will be used in the "From:" line of the email. This is helpful in identifying the source of the alarm email message. If your SMTP mail server has junk filtering, you may be required to use a sender address that matches a mailbox address on the SMTP mail server; check with your mail server administrator for specific details on this issue.

Recipient address 1 (2,3): The AcquiSuite can send a copy of the alarm notice to multiple email addresses. Specify one, two, or three email addresses in the fields provided for the recipient addresses.

NETWORKING

Network Status

This page displays the current status of the AcquiSuite DR network connections. Several interfaces may be shown if both Ethernet and PPP dialin/dialout are active at the same time. Each interface will report the IP address, number of packets sent and received, and other details specific to the interface. For the ethernet interface, the MAC address (HWaddr) will be shown as well as a network collision count.

Ethernet network:

```
eth0      Link encap:Ethernet  HWaddr
00:99:99:0E:C1:CA
inet addr:192.168.10.50  Bcast:192.168.10.255
Mask:255.255.255.0
UP BROADCAST RUNNING MULTICAST  MTU:1500
Metric:1
RX packets:2624171 errors:6 dropped:0 over-
runs:0 frame:0
TX packets:220342 errors:0 dropped:0 over-
runs:0 carrier:0
collisions:1 txqueuelen:100
RX bytes:174674347 (166.5 Mb)  TX
bytes:50607122 (48.2 Mb)
Interrupt:5 Base address:0x320
```

Note: the "lo" or Loopback interface is the internal network and is always present, "eth0" is the Ethernet segment, and "ppp0" is the dialout or dialin connection.

Ethernet setup

The ethernet setup page has the following options:

IP Address: The IP address of the ethernet interface. Default 192.168.40.50

Netmask: The netmask of the ethernet network. Default 255.255.255.0

Gateway Address: The gateway is the routing device that moves traffic from the LAN to the internet. The default is 192.168.40.1. If you do not have an internet connection for your LAN, or if you are using a crossover ethernet cable, leave this field blank.

DNS1, DNS2: These are the primary and secondary DNS servers. If you are using a dialout connection, these must be set to the DNS server provided by your dialup ISP. If you only use the AcquiSuite DR on a crossover cable and/or dialin mode, you should leave these blank.

DHCP (enable/disable): If your LAN has a DHCP server, you may enable this option and remove the previous options for IP, netmask, gateway, and DNS. Check with your LAN administrator first.

HTTP Proxy: If your LAN is connected to the internet using a sophisticated firewall, you may need to use the HTTP proxy feature. Check with your LAN administrator first, however; if you don't have a proxy set on your computer (MSIE/Tools/Connections-tab/LAN-Settings), then you most likely don't need to configure the AcquiSuite DR to use a proxy. If in doubt, leave this blank first, and try the connection test. If it fails, ask your LAN administrator about proxy servers, if any.

After changing any of the settings on this page, you will be required to reboot the AcquiSuite DR. Use the system/status web configuration page, or the LCD console to reboot the AcquiSuite DR.

Troubleshooting Ethernet Problems

If, after reconfiguring the ethernet settings, you experience problems accessing the AcquiSuite DR with your web browser, check the following items.

- Verify that you rebooted the AcquiSuite DR after making the changes to the network settings.
- Use the AcquiSuite DR LCD console. Check the IP address and Netmask. Verify these are correct.
- Verify the network connection in your computer has the proper IP address, on the same subnet, to access the AcquiSuite DR. Note: One common mistake is configuring the laptop IP to the same address as the IP address of the AcquiSuite. In order for the laptop and AcquiSuite to communicate, the IP addresses should not be identical. See the basic network config for suggested IP addresses.
- Use the LCD console to run the Network Status test. This will attempt a number of things including a ping query to the gateway address. If the AcquiSuite DR can ping an external machine such as a gateway, the ethernet port is most likely connected properly. If the AcquiSuite DR does not use a gateway, try adding a gateway address, and make it the address of your computer.

Modem Status

The modem status page will show the connection status of a dialin/dialout session if any is currently active. Also included are two buttons:

Dialout now: This button will cause the AcquiSuite DR to initiate a dialout connection if dialout networking is enabled. This will not initiate a data upload to a webserver database such as BMO. If you manually start a connection with this button, you will need to manually disconnect when you are finished.

Hangup now: This button will cause the modem dialout or dialin connection to be disconnected immediately.

Modem Setup

This configuration option will allow you to configure specific features in the modem if needed. For most applications, the default settings are appropriate. The options are as follows:

Modem type: multitech: A MultiTech modem was detected (default on all H8822 AcquiSuite DR devices).

Max serial port speed: This feature allows you to specify the maximum speed at which the modem can communicate. The default is 57.6 kbps. You may be able to get a more reliable connection by slowing down the rate of data transfer.

Modem setup string: This option allows the use of specialized modem setup strings. The default "AT" is sufficient for most applications

Modem speaker enabled: This option sets whether the speaker is on or off when dialing out or answering a call.

Debug PPP messages: Checking this option will allow the system debug log to show a complete report of the PPP connection status. You must click the "start log" button on the system/log files page to record this information.

Modem Diagnostics: This button will run a diagnostic test on the modem to verify that it is working and report the modem firmware version number.

Modem PPP Dialout

The AcquiSuite DR has a dialout feature that will allow the AcquiSuite DR to place an outbound call and upload data to a central database server. If the dialout feature is enabled, the dialout connection will be initiated before the data upload process is started. Dialout connections allow the AcquiSuite DR to connect to a generic PPP server such as a RAS system, or an internet service provider (ATT Worldnet, Earthlink, Netcom, etc.). Internet services that require custom software such as AOL, Juno, and ATT Global are not supported. To test if a dialup service is supported, simply use the MS Windows built in dialup-networking feature and attempt to establish a connection. If successful, the AcquiSuite DR should work with the service. You may wish to test the dialup account phone number, username and password with windows first to verify that the account works correctly.

Enable/Disable: Turn on or off the ability to place an outbound call to an ISP. Note: when enabling this feature, the default ethernet gateway in the network setup webpage is removed. You must reboot after enabling or disabling dialout support to make the change take effect.

Phone number to dial: This is the phone number to call. A comma can be used to pause for 1 second, useful after dialing 9 for an outside line.

Username: The login or username of the dialup account at your ISP.

Password: The password for the ISP account.

Example Dialout to an ISP or RAS

The AcquiSuite DR has the ability to place phone calls to a Remote Access Server (RAS) or ISP in order to upload data that has been collected from the Modbus devices. This feature is useful when using the AcquiSuite DR on a phone line with the Building Manager Online service, or with your own data collection server. Dialout configuration is not useful if you do not have a central database server to send the data to.

1. Collect the necessary information. You will need some details about the ISP or RAS you will be calling:
 - Dialout prefix and long distance code, if needed (i.e. dial 9 for an outside line)
 - ISP or RAS telephone number
 - ISP or RAS login name
 - ISP or RAS password
2. Plug a regular telephone into the phone line that the AcquiSuite DR is to use. Verify the line has dialtone. Attempt dialing the ISP or RAS phone number, and confirm a modem answers the phone. If so, hangup, attach the AcquiSuite DR to the phone line, and proceed to the next step.
3. Select the Network/PPP0/ModemSetup option from the AcquiSuite DR configuration webpage. Set the "setup string" by clicking on the "use default" button. The default is simply "AT." Click apply changes to save the setting.
4. Select the Network/PPP0/DialoutSetup option from the AcquiSuite DR configuration webpage. Verify the basic configuration page is shown (the default). If the "show basic" button is present in the lower right, click it to reduce the number of choices to the following.
 - Check the box to enable dialout.
 - Enter the phone number in the space provided.

- Enter the login name and password to the ISP dialup account in the space provided.
- Click Apply Changes to save the settings.

5. Reboot the AcquiSuite using the system/status page or the console push button menu.
6. Use the Connection Test page in the Testing/Diags menu on the AcquiSuite DR for a full report of the dialout connection progress. Even if you are not using the BMO service, you can still test dialout with this feature. You may however receive an error that the AcquiSuite DR is not allowed to transfer data to the BMO server. Further information on the connection test is provided in the connection test section of this manual.

GSM/GPRS Cellular modem (H8822-GSM only)

The AcquiSuite DR model number H8822-GSM includes a GSM/GPRS cellular modem. GPRS can provide the AcquiSuite DR a connection to the internet without using a land base phone line or LAN connection. This is often helpful in providing communications in remote areas or in customer sites that will not allow LAN connections for security purposes.

The GSM/GPRS cellular option is very similar to the standard modem configuration. Both provide the AcquiSuite DR a way to place a call and get an internet connection. For the GPRS services, the cellular provider handles the internet connectivity part, so all you need to do is set up the cellular service account.

To enable your GSM/GPRS modem, you must sign up for a data-only account with your cellular provider. You may need to supply the MEI number for the cellular modem which is located on the modem section of the AcquiSuite DR. Alternatively, the modem/diagnostics section will print the modem's IMEI number as well. When requesting service, it is often easiest to explain that you need data only service for internet access. You should receive a SIM card from your service provider. Install the SIM card in the slot provided on the right side of the cellular modem inside the AcquiSuite DR.

Run the modem diagnostics test to confirm the SIM card is installed and working correctly. Also note the diagnostics page prints the current cellular provider's name, as well as the strength and quality of the cellular tower signal.

Enable/Disable: Turn on or off the ability to place an outbound call to an ISP. Note: when enabling this feature, the default ethernet gateway in the network setup webpage is removed. You must reboot after enabling or disabling dialout support to make the change take effect.

APN: This is the access point name for the GPRS service provider. For Cingular, this is "CINGULAR"

Login name: The login or username of the dialup account at your cellular provider. For Cingular, this is "CINGULAR@CINGULARISP.COM"

Password: The password for the ISP account. For Cingular, this is "CINGULAR"

Once GPRS dialout is configured, use the Diagnostics / Connection Test to confirm the cellular service providers connection is working properly.

Modem PPP Dialin

The AcquiSuite DR is designed to allow incoming connections from any generic PPP system including MacOS, Linux, Windows 9x, XP and 2000. The dialin feature is disabled by default, and must be enabled from LCD console or the dialin options menu in order to receive calls. Dialin options include the following:

Enabled: Check this checkbox to enable dialin support. When checked, the AcquiSuite DR will answer any ring on the phone line, after the first ring. If not checked, the AcquiSuite DR will never answer a ring on the phone line.

Local IP address: This is the IP address assigned to the AcquiSuite DR side of the dialin connection. This address is the one which you must use on the computer in the web browser address line when remotely accessing the AcquiSuite DR with a dialin connection. The default is 192.168.238.1

Remote IP address: This is the IP address assigned to the calling computer. The default is 192.168.238.2

Netmask: The netmask that defines the subnet for both the local and remote IP addresses. The default is 255.255.255.0

Unless you have specific requirements, the default IP, remote IP and Netmask should be sufficient. Note: GSM/GPRS products do not allow dialin communications.

Dialin from a computer to the AcquiSuite DR

The AcquiSuite DR has the ability to receive and answer phone calls from a Windows computer in order to allow remote configuration, or to collect data that has been logged from the modbus devices. This feature is useful when using the AcquiSuite DR on a phone line and a central database server is not present. The dialin feature will support the Windows built-in dialup networking features, and can be used as easily as a dialup ISP service.

1. Collect the necessary information. You will need some details about the ISP or RAS you will be calling.
 - A dedicated phone line is required, and can not be shared with a fax machine or other device.
 - Telephone number (the phone line the AcquiSuite DR is attached to)
 - Static IP address: 192.168.238.1 (the AcquiSuite DR PPP IP address)
 - Static Netmask: 255.255.255.0
 - Remote Address: 192.168.238.2 (the IP address assigned to the calling computer)
 - Admin password
2. Plug a regular telephone into the phone line that the AcquiSuite DR is to use. Verify the line has dialtone. Use a second telephone and dial the AcquiSuite DR phone number to verify the first telephone rings and that it can be answered. If it does not ring, verify the telephone number dialed is actually associated with physical phone line. If the line tests succeed, hangup, attach the AcquiSuite DR to the phone line, and proceed to the next step.
3. Select the Network/PPP0/ModemSetup option from the AcquiSuite DR configuration webpage. Set the "setup string" by clicking on the "use default" button. Click apply changes to save the setting.

4. Select the Network/PPP0/DialinSetup option from the AcquiSuite DR configuration webpage.

- A. Check the "dialin enabled" option
- B. Set the IP, Netmask, and Remote Address as shown in Dialin Address Worksheet. The IP addresses shown (factory default) will work for most dialup connections. If you make changes to the IP address, make note of it for future use.
- C. Click "Apply" to save your changes.

Example Dialin from a WinXP computer

The AcquiSuite DR is designed to allow connections from any generic PPP system including MacOS, Linux, Windows 9x, XP and 2000. We have found that windows XP/2000 has a timeout issue that affects some computers but not others. When calling the AcquiSuite DR with windows XP/2000 you may receive an error message stating that a loopback error was detected, preceded by windows hanging up promptly after connecting to the AcquiSuite DR. If that is the case, a slight delay in the dial process for windows will correct the problem. Adding this delay in a dial script is detailed below.

1. Using notepad, create a text file called "c:\windows\system32\ras\AcquiSuite DR.scp." In that text file, add the following script

```
proc main
delay 2
endproc

Save and close the file
```

2. Create a windows networking connection.

- A. From the control panel, select Network Connections. Click "Create a new connection"
- B. The "Connection Wizard" will appear with a welcome screen and no options. Click next.
- C. Select "Connect to the internet" and click next.
- D. Select "Set up my connection manually" and click next.
- E. Select "Connect using a dialup modem" and click next.
- F. Enter "My AcquiSuite DR" for the ISP name (you may want to name each AcquiSuite DR connection by the name of the building where it resides). Click next.
- G. Enter the phone number of the phone line attached to the AcquiSuite DR. Click next.
- H. Enter "admin" for the username, and the admin password in the password field. Uncheck the option "Make this the default internet connection." Click next.
- I. The connection wizard will show you that the setup is complete. Click Finish.

3. Configure connection details.

- A. Right click on the "My AcquiSuite DR" connection icon you created in step 2 above (you may also click the properties button in the dialout dialog box).
- B. General Tab: defaults are ok.
- C. Options Tab: Verify the option "include windows login domain" is not checked. Set any timeout values if desired.
- D. Security Tab: Security: Use "Typical", allow unsecured password. At the bottom of the dialog box, in the section "Interactive Login and Scripting". Check the "Run Script" checkbox. Click the browse button below the script name. Select the AcquiSuite DR.scp file created in step one above. Click the open button. The script name should appear to the right of the Run Script checkbox.
- E. Networking Tab: defaults are ok.
- F. Advanced Tab: defaults are ok.
- G. Click Ok to save the changes.

4. Dial the connection.

- A. Double click the "My AcquiSuite DR" connection icon.
- B. Complete the password field if it is blank. The password is the Admin password of the AcquiSuite DR.
- C. Click the dial button. The modem usually takes between 40 and 60 seconds to establish a connection.

Once the connection is established, use your web browser to connect to the AcquiSuite DR by entering <http://192.168.238.1/setup/>

Where 192.168.238.1 is the Static IP address listed in the Dialin Address Worksheet.

Your browser will now be able to access the AcquiSuite DR the same way as you did in the LAN/Direct Connection setup in previous sections of this manual.

SYSTEM OPTIONS

Status

The system status page shows the current memory and flash disk utilization values, system up-time, and load average. Also included on this page are two buttons for Reboot and Shutdown. It is important to use the shutdown option prior to removing power from the AcquiSuite DR. The LCD console will report the reboot or shutdown status.

Processes

The system process table is shown in both tree and tabular formats. The process list is useful when contacting Veris technical support.

Date and Time

The AcquiSuite DR keeps time using UTC or Universal time. All log files are recorded in UTC time as well. Timestamps shown on the AcquiSuite DR local configuration pages are converted to local time for the convenience of the installer. The date/time configuration page provides the following options:

Date/time in UTC and local time.

Date/time dropdown menus to select the current (local) time manually.

Time zone: a drop down list of the supported time zones.

Time sync protocol: Select NTP or Rdate. Most Linux/Unix systems provide rdate, however many provide NTP as well. Windows domain servers can also provide NTP. If possible use NTP as it is a more robust protocol.

Time Server: Specify the dns name or ip address of your time server. The default "time.obvius.com" can be used if the AcquiSuite DR has a connection to the Internet. You may need to verify if your firewall will allow NTP or Rdate packets to pass through. Generally, it is better to use a local time server if possible. The time server time.obvius.com supports both NTP and Rdate time protocols.

Universal Time Is Your Friend

Log data is stored in UTC time. This allows data collection services such as BMO to collect data from multiple sites in different time zones. If you are operating your own database system to store log data from the AcquiSuite DR, it is best to store the data in UTC time in the database as well, and only convert it to local time when generating the final report or graph for the user.

If you store data in local time, you may encounter a number of issues:

1. Local time is relative. Is local the time where the AcquiSuite DR exists, or local to where the data is stored. If local to the AcquiSuite DR, you must shift each AcquiSuite DR data set depending on its location.
2. There are about 11 time zones in the US. Some observe DST, others do not. These include Alaska, Aleutian, Arizona, Central, Eastern, Hawaii, Indiana, Michigan, Mountain, Pacific, and Samoa.
3. When converting to local time, there will be one hour of overlapping data in the fall when the time is adjusted for Daylight Savings time, i.e., log entries run 12:45, 1:00, 1:15, 1:30, 1:45, 1:00, 1:15, 1:30, 1:45, 2:00am. This will prevent you from sorting your data by time in your database.
4. In the spring, you will have a gap in the data from 1:59 to 3:00am. This can cause problems if you are calculating demand values based on consumption.

5. Converting Local time to any other timezone usually involves converting it to UTC first.

Using UTC time solves these problems elegantly. The best practice is to store data in the database in UTC format and then convert the information when generating a report for the user.

For example, if you wish to draw a graph of KW over Time, prompt the user for a date range, say Jan 1 midnight to Jan 2 midnight. Take the user specified end points and convert these times from Local time to UTC. Next, create an SQL query using the new UTC formatted data as your select statement. i.e.:

```
SELECT * from TABLE where time > '2003-01-01 08:00:00' and time < '2003-01-02 08:00:00'
```

Note the time is 8 hours ahead of local time. This example is for Pacific which is 8 hours off from UTC. This will return a list of data points between the two specified time ranges. Next, plot the data on a graph, using the UTC times for start and end points. Lastly, when drawing the 'time' legend on the graph, convert the values back to Local time before displaying, i.e., 2003-01-01 00:00:00 to 2003-01-02 00:00:00. Any division lines on the time axis can be handled the same way. The advantage of using this technique is that it will properly draw a graph across DST change boundaries. The graph axis is based on UTC time with no DST, and will not show a gap or overlap at the time of the change. The axis labeling will be correct as well, matching the UTC times precisely.

Another way to handle the conversion is to query and convert all the returned timestamps to local time before drawing the graph. This is useful if you do not have detailed control over the graph legend drawing process. This technique will not properly graph across DST changes as the graph is based on local time including DST changes.

System logs

The AcquiSuite DR can keep several log files that report the general operation of the system, not related to the normal data logs. These include the following:

Kernel: Startup messages about the Linux operating system. This log shows what hardware items were detected and initialized.

Upload: This log file contains a report from the last data upload attempt to remote database/webserver such as BMO. This log will show if any log files are being rejected by the database/webserver, or if the network is not allowing a connection.

Debug Messages: The AcquiSuite DR can run a "syslog" process to record more detailed information about its operations, however this log consumes vast quantities of memory quickly, and is disabled by default. Click the "start log" button to enable the feature. Click the "end log" button to disable. Note: when the AcquiSuite DR is rebooted, the debug log will be disabled on startup.

Ftp log: This log shows a list of files transferred by FTP on the AcquiSuite DR.

System boot log: This log shows when the AcquiSuite DR was started, and lists process events such as remote logins, or logger process restarts. This log is most useful for detecting when the AcquiSuite DR was restarted, and whether there was a proper shutdown event prior to rebooting (if not, possibly a power outage).

Start/End logging: This button allows the user to start detailed logging or

disable it if it is running.

Purge Log Files: This button will clear all the system log files listed on this page, but not the meter data log files (deletes kernel, boot, ftp, messages, upload log files).

Firmware Update

The AcquiSuite DR can upgrade its own firmware using the firmware update page. The AcquiSuite DR must have an Internet connection to communicate with the Veris.com website for firmware updates. If a LAN connection is present and configured, it will be used by default. If the AcquiSuite DR uses a dialout connection, you must first enable the dialout by clicking the "dialout now" button on the Networking/Modem-ppp/Status page.

After clicking the "Check for updates" button, the AcquiSuite DR will contact the Veris.com webserver and attempt to download a list of firmware files. The list is compared to the firmware versions installed, and a listing of the files will be displayed. If any firmware updates are available, a button to the right will be shown labeled "Upgrade." The firmware files are as follows:

as.cramfs: The main AcquiSuite DR firmware file including the Modbus and data logging software.

usr.cramfs: High level system support files such as FTP, and time zone information.

ramdisk.gz: Low level system files and system libraries.

zImage: The Linux operating system.

H8822.hex: The analog/pulse IO co-processor firmware.

When clicking on the Upgrade button, the AcquiSuite DR will again contact the Veris.com website and download the requested firmware image file. The AcquiSuite DR will take a few seconds to verify the file checksum and prompt you with an "Install" button. Click the install button and the AcquiSuite DR will install the firmware update and reboot itself to make the changes take effect.

Do not power down the AcquiSuite DR during any step of the firmware update process. Doing so may corrupt the system and render the AcquiSuite unusable.

DIAGNOSTICS

Host Lookup

The Host Lookup page provides the ability to do some basic network tests. These are as follows:

Ping: send an echo request to the specified host.

Traceroute: Send an echo request to the target address and attempt to locate every router in between the Acquisuite DR and that address.

Nslookup: convert the dns name to an IP address, useful for testing the functionality of the DNS server configured in the Network/Setup webpage.

To run a network test, enter the IP address or DNS name in the field provided, check the checkbox next to the test you wish to use, and click the OK button. Multiple tests can be specified.

Connection Test

The connection test page will attempt to establish an HTTP session with the specified upload server. Click the "begin test" to start this process. Information will be printed in black. Success responses will be printed in Green, failure messages will be printed in Red. A sample upload test follows:

```
Ping localhost [127.0.0.1]: Success
Ethernet IP address [192.168.10.50], mask [255.255.255.0]
Local subnet [192.168.10.0] to [192.168.10.255]
Ping ethernet ip address [192.168.10.50]: Success
Starting system debug logger
Dialout not enabled, using ethernet LAN connection.
Ping ethernet gateway [192.168.10.1]: Success
Ping DNS #1 [192.168.10.1]: Success
The DNS #2 server address is not configured.
Resolving time server [time.obvius.com] to an IP address:
Success. Got [198.107.56.37]
Ping time server [time.obvius.com]: Success
Testing time server
SyncTime: Sync system time with time.obvius.com.
16 Dec 19:49:36 ntpdate[3165]: adjust time server
198.107.56.37 offset 0.009985 sec
new time: Tuesday, December 16 2003 19:49:36 PST, drift
1 seconds.
Processing upload url.
No proxy specified, using direct connect method.
Upload URL looks ok: http://www.buildingmanageronline.com/
upload.php
Resolving web server [www.buildingmanageronline.com] to an
IP address: Success. Got [198.107.56.37]
Ping web server [www.buildingmanageronline.com]: Success
Connecting to server at [198.107.56.37:80]: Success
Sending HTTP request: Success
Reading response:
Upload test completed. Got:
HTTP/1.1 200 OK
Date: Wed, 17 Dec 2003 03:49:38 GMT
Server: Apache/1.3.23 (Unix) PHP/4.1.2 AuthMySQL/2.20
X-Powered-By: PHP/4.1.2
Connection: close
Content-Type: text/html
SUCCESS - Test Successful
Closing TCP connection
Shutting down system debug logger
Test complete
```

Note in the last section where SUCCESS is indicated. A failure would be caused by an incorrect password.

LCD CONSOLE

The AcquiSuite DR has an LCD console and two push buttons labeled “Menu” and “Select.” These can be used to configure some of the basic features. The intended purpose of the console is to configure the AcquiSuite DR to a point where a computer can communicate with it for further detailed configuration.

When the AcquiSuite DR is running, it will show “AcquiSuite Ready” and the current time alternated with the ethernet IP address. If you choose to enable the console display of data points, the LCD will also show the selected point names and current reading values. The display will change to the next listed item about once every 10 seconds. If a data point name is longer than will fit on the 16 character wide display, it will be scrolled. Pressing the select button will cause the display to change to the next configured item. Pressing the select button quickly will skip through multiple display points.

Pressing the Menu button will cause the main menu to appear. Once [Main Menu] is shown on the console, the menu button will change the menu option, and the select button will take action on the currently displayed option. Some options provide sub menus, others allow you to edit the option value. The following is a tree display of the main menu and sub menus.

```
[Main Menu]
TCP/IP Config
  [TCP/IP Config]
  IP Address
  Netmask
  Gateway
  DNS Server #1
  DNS Server #2
  (previous menu)
Network Status
Dialin
Modbus Status
Upload Data Now
Shutdown
Reboot
(previous menu)
```

The TCP/IP sub menu will allow you to configure the ethernet settings for the AcquiSuite DR. To edit the IP settings, use the menu button to change options, and press the select button to edit the option. Once selected, you will see the current value displayed and a blinking square cursor on the first character. Press the menu button to change the character or digit. Press the select button to use the digit and move the cursor to the right one space. If you press the select button multiple times, the cursor will move right a similar number of spaces, allowing you to skip over characters that may be correct based on the previous settings. When you are finished entering the IP address, select a blank space with the menu button, and press select. Any characters still remaining to the right of the cursor will be eliminated (i.e., if changing 128.193.100.200 to 10.0.0.1, the new IP address will be several digits shorter than the old one).

Network Status: This option will test the ethernet connection by attempting to ping the following addresses: localhost, ethernet IP address, gateway, DNS1, DNS2. The local host ping will verify the kernel IP stack is properly initialized. The ethernet ping will verify the ethernet card's IP address is set and communicating with the kernel. The ethernet ping test does not send any packets over the ethernet cable however. The gateway ping test will verify that the gateway address responds to queries. This test is the first one that actually sends packets over the ethernet wire. The gateway test does not verify the IP address of the gateway is correct, or that the gateway is working correctly. It only tests that the address specified as a gateway responds to a ping request. The DNS1 and DNS2 ping tests verify the IP addresses listed for DNS servers respond to ping requests. This test does not verify if the DNS servers can actually resolve DNS names to IP addresses.

For a more complete test, use the connection test web page in the AcquiSuite DR diagnostics menu.

Dialin: This menu provides the ability to enable or disable dialin support. From the console, the installer can enable dialin support and allow a remote user the ability to call the AcquiSuite DR and configure the options without requiring a computer on site. For more information on connecting to the AcquiSuite DR review the “Modem/PPP Dialin” section of this manual.

Modbus Status: This option will report the number of devices currently detected by the AcquiSuite DR. The display will show a device count for “Devices OK,” “New,” and “Failed.” These are explained below:

Devices OK: The number of Modbus devices that are presently working, and have been configured.

New: Devices that the AcquiSuite DR supports, and are working, but have not yet been given a name.

Failed: The number of Modbus devices that either stopped responding, or are not supported by the AcquiSuite DR. Note: selecting the Modbus status option from the AcquiSuite DR console does not cause the AcquiSuite DR to search for new devices. The AcquiSuite DR checks for new devices in the background all the time, taking about 2.5 minutes to complete each pass through all 255 possible addresses. The Modbus test console option simply displays the number of devices the AcquiSuite DR presently knows about.

The AcquiSuite DR has a built in IO module with 4 analog and 4 pulse inputs. This module shows up in the Modbus listing as device 250, and is counted in the number of devices OK or New. Therefore, if you have one AcquiSuite DR H8811 with a single Modbus power meter, the device count will be two, (one for the meter, and one for the AcquiSuite DR on board IO).

Upload Data Now: If the AcquiSuite DR is configured to upload data using HTTP/POST to a webserver/database such as BMO, this option will cause the AcquiSuite DR to upload all stored data immediately. If the dialout option is enabled, an outbound phone call will be initiated, and disconnected after the transfer is complete.

Reboot: This option will reboot the AcquiSuite DR.

Shutdown: This option will stop the data logging processes and secure the flash memory. When secured, the console will state that the power may be disconnected. It is important to shut down the AcquiSuite DR cleanly prior to disconnecting the power from the device.

The AcquiSuite DR has an advanced menu that can be used to perform system checks and clear all configuration options to the default settings. To access the advanced menu, wait until the LCD shows "AcquiSuite Ready" and press both the Menu and Select buttons at the same time. Hold both down together for about 10 seconds. When the advanced menu is displayed, you may release the two buttons. The following is a tree display of the advanced menu.

```
[Advanced Menu]
Console on COM1   (RS485 port)
Check flash disk
Erase Log/Config
(previous menu)
```

The Check Flash Disk option will force the AcquiSuite DR to check the entire flash disk for file system integrity. This will require you to reboot the AcquiSuite DR.

The Enable Console feature will provide a shell prompt on the serial port for remote diagnostics. This is intended to be used by Veris technical support only.

The Reset Configuration option will remove all the user settings, data, and passwords that have been configured and will return the AcquiSuite DR to the factory default settings. This is mainly useful when reconfiguring an AcquiSuite DR that has been used previously on a different job or project.

LOG FILE DATA

The AcquiSuite DR stores data from the modbus devices in text (csv) log files. One log file is created for each modbus device on the system. On a daily basis, the log files are "rotated," that is the current log file is renamed and compressed with gzip compression, and a new log file is started. This allows the AcquiSuite DR to make efficient use of the flash memory. When the storage capacity is beyond 95% full, the oldest log file will be removed from the system.

Log File Status

The AcquiSuite DR can display a list of log files in the "log file data/status" web configuration page. A bar graph will show the amount of storage capacity that is used by the existing log data. Below, a list of modbus device log file will be displayed along with the file size and timestamp when the file was last modified.

Each modbus device may have multiple log files. The log file name starts with "mb-xxx," where xxx is the modbus device id number. One file, with the .log extension is the file where the most recent data is being stored. Other log files have a .gz extension. These are older log data files that have been compressed to save space.

The file name will be a link that will open up a browser window to view the contents of the single log file. Clicking on the single log file will only show the contents of that log file, and not all historical data for the device. Use the log export feature if all log data is required.

Log File Format

Once you have downloaded the data from the AcquiSuite DR, you will need to process it. The file is an ASCII text file with comma delimited data. One line is recorded for each log cycle. The file will look something like the following example from a H8923-4 IO Module.

```
'2002-01-31 18:30:00';0,0,0,-0.00,89.29,39.05,49.11,0,0,0,0
'2002-01-31 18:35:00';0,0,0x02,-0.01,104.24,39.05,49.11,0,0,0,0
'2002-01-31 18:40:00';0,0,0,NULL,87.82,39.05,49.11,0,0,0,0
'2002-01-31 18:45:00';139,NULL,NULL,NULL,NULL,NULL,NULL,NULL,NULL
```

In this example, the first line shows a regular log entry. The second line shows a high range alarm for data point 2. The third column shows point 1 as invalid, and the fourth line shows the modbus device is not responding.

Notice the following columns are shown.

1. Date/Time in UTC (GMT) time. This field is quoted to handle the space in the middle. The format is YYYY-MM-DD HH-MM-SS
2. Modbus error (if any). 0=no-error, see table below.
3. Low Range alarm bitmap (hex notation).
4. High Range alarm bitmap (hex notation)
5. Data point 1
6. Data point 2
7. ---
8. Data point N

Comments:

Date/Time: The date/time column reports the time at which data was logged from the modbus device. Note: this is not necessarily the time at the start of the log cycle. Users with large number of devices may notice some of the modbus devices at higher address numbers report 1 or 2 seconds after the first modbus devices. This is because the 9600baud speed of the modbus loop is not fast enough to log all modbus devices in less than 1 second. If a device does not respond during a log cycle, the AcquiSuite DR will attempt to query the device several more times. If a subsequent query is successful, the time of the successful query will be used in the log file but may be several seconds after the initial log cycle.

The log date/time is in Universal time. (UTC) This means that the data is logged with no shift for daylight savings time, and must be converted to local time for reporting purposes. When importing into a database, data should be kept in UTC time for ease of use. When reporting the final data, you should adjust the time to reflect the local timezone for which you are reporting. The data export option on the BMO website will prompt you for a timezone when you export the data, and will adjust the log date/time accordingly. Note: UTC is sometimes referred to as GMT. (Greenwich Mean Time)

Modbus Error: If the error value is not 0, the remainder of the columns for this line will be reported as NULL.

- 1 Operation not permitted
- 2 No such file or directory
- 3 No such process
- 4 Interrupted system call
- 5 Input/output error
- 6 No such device or address
- 9 Bad file descriptor
- 11 Resource temporarily unavailable
- 12 Cannot allocate memory
- 13 Permission denied
- 16 Device or resource busy
- 19 No such device
- 23 Too many open files in system
- 24 Too many open files
- 26 Text file busy
- 28 No space left on device
- 32 Broken pipe
- 101 Network is unreachable
- 110 Connection timed out
- 111 Connection refused
- 113 No route to host
- 129 Illegal Function (function was not allowed by the slave device)
- 130 Illegal Data Address (the data address is not allowed by the slave device)
- 131 Illegal Data Value
- 132 Illegal Response Length
- 139 Device Failed to Respond (the modbus device may be off or disconnected)
- 160 Start log (Entry in log file after AcquiSuite DR starts up)

161 Stop log (Entry in log file if AcquiSuite DR is shut down properly)

Low/High Range Alarms: This number is a hex representation showing which data points are out of range. 0x01 shows data point 1 in alarm state. 0x04 shows data point 3 in alarm state.

Data Points: Data points are shown in the same order as the modbus device configuration display in the modbus/device list page. Data is displayed in floating point form. When a specific point is unavailable (4A4P-M broken wire alarm) or the point is not supported as part of the configuration (phase B current on a single phase H8163 meter hookup) the point will be logged as NULL. This preserves the column structure of the file, and allows notation of invalid data. SQL databases often accept NULL as a valid entry in a data table to represent invalid data.

For data exported from the BMO website, the columns that are invalid (NULL) are reported as blank fields. This makes it easier to import into MS Excel as blank cells. At some point in the future, the AcquiSuite DR will be converted to report blank fields rather than "NULL" to make direct import of data from the AcquiSuite DR easier, as well as reduce the file size. Developers intending to use data files from the AcquiSuite DR should handle both the word "NULL" as well as a blank column as indications of an invalid data point.

Log Storage Capacity

The AcquiSuite DR uses approximately 2 Mbytes of flash disk for log file storage. As data from the modbus meters is collected, it is appended to log files on this flash chip. Once a day (at the first call-out period for uploading data) the log files are "rotated". This action renames each log file and compresses the old file using gzip. The net result is a smaller file for storage or modem/ethernet transfer.

Because the files are compressed, the actual size of the data on the flash chip will vary depending on the data itself. For example, if a device is reporting 25KWh, it will use fewer bytes than a log entry that has 9,999,999KWh.

We have measured a typical installation with 2 H8036 power meters and 2 H8923-4 IO modules, and determined the system will run for approximately 80 days with a 15 minute log cycle. Changing the number of meters or the log cycle period will affect your results accordingly.

When the AcquiSuite DR storage area on the flash starts to run out of space, the following action is taken:

- When the 2 Mbyte log file storage area is 75% full, the AcquiSuite DR will immediately compress the log files and attempt to upload the data to the BMO website or user specified site. This action will not wait until the next scheduled upload time.
- When the storage area is 95% full, the AcquiSuite DR will immediately attempt to upload the data, and if unsuccessful, will purge the oldest (rotated) log data file.

Log files are deleted automatically if the AcquiSuite DR has successfully uploaded the log file to a database server using the HTTP/Post protocol. If you do not configure the AcquiSuite DR to automatically push the log files to your server, you must manually delete them. To delete log files, refer to the FTP method of downloading log files. One step detailed in the FTP section is how to delete a log file from the AcquiSuite DR.

Uploading data to the BMO website.

After the AcquiSuite DR has been configured and has logged some data, you will want to collect the data for analysis. There are several ways of collecting the data from the AcquiSuite DR including the Building Manager Online service. Other methods are noted in the data collection FAQ. This section details configuring the AcquiSuite DR for use with the BMO service.

1. First, use your browser to connect to the AcquiSuite DR. Select the Modbus/Setup section from the menu on the left. In the field titled "Modbus Loop Name" enter a name for this AcquiSuite DR to uniquely identify it on the BMO website. Because the BMO site can show multiple AcquiSuite DR devices, it is important to have a descriptive name in this field.
2. Select the "Log File Data", "Setup/Upload" menu option. The following features are available:
 - AcquiSuite DR Serial Number: This is the serial number that uniquely identifies this AcquiSuite DR. This number can not be changed. When uploading data to the BMO website, this serial number is used to identify the AcquiSuite DR to the BMO server.
 - Scheduled upload time: This option allows you to control when the AcquiSuite DR will initiate the upload process. You can select any hour of the day, and the AcquiSuite DR will select some time at random within that hour to start the upload. The random feature allows multiple AcquiSuite DR devices to share a single dialup account or phone line by not starting the dialout at the same time for all devices. If the AcquiSuite DR is on a LAN connection (DSL, Cable Modem, T1, etc) an upload time of "hourly" may be selected.
 - Upload data on alarm status change will cause the AcquiSuite DR to initiate the upload process if any point on any modbus device enters or leaves an alarm state. This allows the AcquiSuite DR to send data when an alarm is detected, and will upload that information to the BMO website in a timely manner. The BMO website will then send email notifications if necessary. If this option is disabled, the BMO website may not be able to send notifications until the end of the day when the AcquiSuite DR calls in at its specified upload time.
 - Upload data on low disk alarm: This feature will cause the AcquiSuite DR to attempt a data upload immediately if the log file storage area is more than 75% full.
 - Allow remote modbus device configuration: If enabled, users may remotely configure alarms and other modbus device features on the BMO website. When the AcquiSuite DR uploads data to the BMO website, it will also download any new configuration information as needed. Note: if configuration changes are made to the AcquiSuite DR, those changes will be uploaded to the BMO site. If configuration changes are made at both the AcquiSuite DR and the BMO website, the most recent changes will be used.
 - Target Address to upload data: This is the website URL to upload data to. This should always be set to "http://www.buildingmanageronline.com/upload.php" unless you are configuring the AcquiSuite DR to send data to your own internal database server.
 - Password to upload data: This password is used by the BMO webserver to verify the AcquiSuite DR device authentication before accepting the uploaded data. You should select a password other than the default, and make note of it for future reference.
 - Number of times to retry: In the event of a failure (often due to dialup problems, busy signals, etc) this option specifies the number of retries to attempt the upload again. If all retries fail, the AcquiSuite DR will wait until the next scheduled upload time before trying again.
3. Contact the Veris Technical Support department. Please have the AcquiSuite DR serial number and password to upload data handy. Your tech support representative will confirm your BMO account and will add the AcquiSuite DR to one of your client databases.
4. Click the "Upload Data Now" button. Your data should be sent to the BMO webserver.
5. For more detailed information about the transfer process, use the Connection Test page in the Testing/Diags menu on the AcquiSuite for a full report of the data upload progress.

RETRIEVING DATA FROM THE ACQUISUITE

Now that you have installed your AcquiSuite DR and configured it to collect data from your meters and sensors, you will want to retrieve the data from your AcquiSuite DR. This section provides an overview for collecting data from the AcquiSuite DR. Processing the data for billing reports, summaries, and other data processing are beyond the scope of this document. There are four basic ways to collect data from the AcquiSuite DR:

1. HTTP download from the AcquiSuite DR with a browser (pull)
2. FTP download from the AcquiSuite DR (pull)
3. Enertrax DL download from the AcquiSuite (pull)
4. HTTP Post: The AcquiSuite DR uploads data to a database/webserver (push)

HTTP Direct from the AcquiSuite DR

The AcquiSuite DR has the ability to export log file data to a web browser directly from the setup web pages. To use this feature, access the AcquiSuite DR setup menu with your web browser. Select the "Log File Export" page from the Log File Data menu on the left side of the page.

For each device, a separate log file will be saved. Select the device from the dropdown list provided. Specify Comma or Tab delimited data, and indicate if column headers are required. Click the download button to download the data.

The log file format is the same as is provided by FTP and by the BMO web site. Note: All timestamps are in UTC.

When importing log files into Microsoft Excel, be sure to specify the log data is comma separated, and use a single quote mark as the text delimiter.

FTP Direct from the AcquiSuite DR

The AcquiSuite will allow inbound connections for transfer of log data files using the FTP protocol. FTP to the AcquiSuite and log in using the system admin password. Files are located in /var/log/modbus. For further information on FTP log file transfer, review the technote and FAQ section of the Veris website.

Enertrax Download Direct from the AcquiSuite

Veris provides a free tool called Enertrax DL that can automate the process of downloading log data from the AcquiSuite to your Windows PC hard drive. Enertrax DL can merge new log data into existing log files on your computer as well as provide configuration information about the AcquiSuite. Enertrax DL can also be configured to make LAN or dialup calls to one or more AcquiSuite or AcquiLite data acquisition servers. Enertrax DL can be obtained from the Veris.com website in the Products section.

HTTP/Post Upload To Building Manager Online

- AcquiSuite DR sends data to the BMO website
- The BMO Website stores the data in a SQL database.
- Quick reporting from our website
- Includes remote AcquiSuite DR configuration service.
- Includes alarm notification by email.
- Data available for download in CSV/Tab delimited format upon your request.
- For pricing service, information, contact sales@buildingmanageronline.com

HTTP/Post Upload To Your Database Server

- AcquiSuite DR uploads data directly to your webserver or database server.
- You must supply a script to process the incoming data. Sample script for Linux/PHP is available upon request.
- Requires Webserver, CGI Scripting and, database (SQL) knowledge
- Alarm processing available by processing data on your server when data is uploaded
- Designed for integration with existing energy reporting systems.

Removing Data From the AcquiSuite DR

When using an HTTP/Post method to allow the AcquiSuite DR to push data to a database server, the AcquiSuite DR will automatically remove log files from its' flash memory once the AcquiSuite DR has confirmed that the file was received by the database server.

If you are using the AcquiSuite DR with a standalone mode, you can use FTP to delete log files from the flash memory. This is essentially the same process as in the manual FTP data download section.

At the Microsoft Windows command prompt ftp, use the following commands.

ftp 192.168.40.50	Use the IP address of your AcquiSuite DR
username: root	
password: admin	The same as the admin password
cd /var/log/modbus	
dir	View a list of log files.
mdel *.gz	Remove the log file to free up flash space
bye	

The model command will tell the FTP software to delete all files ending in .gz in the current directory. Some FTP clients will allow you to specify a command "prompt" prior to using mdel that will prevent the FTP client software from asking if you are sure you wish to delete each file.

Linking to AcquiSuite DR Device Status Pages

It may be helpful to create a shortcut or a hyperlink on another web page that will direct the browser to bring up a specific device status page in your browser. To do this, right click on the page and select Properties. The url for the page will be shown on that dialog. Copy and paste this url into your link.

To format a URL that will bypass the username/password prompt, you can include the login information in the URL itself. Note however that this will allow any one to discover the password for the AcquiSuite DR. Consider using this only with the "user" account. This technique is shown in the following example:

http://user:mypassword@192.168.40.50/setup loggersetup.cgi?ADDRESS=001

Note: the address=001 section specifies which modbus device to display. To allow the user to be prompted for the login/password, remove "user:mypassword@" from the example URL.

Note: This URL syntax is no longer supported in Internet Explorer or in Windows Explorer after you install the MS04-004 Cumulative Security Update for Internet Explorer.