


# Current Switches with Relay: Adjustable Trip Point, High Voltage Output

Status And Control In One Package

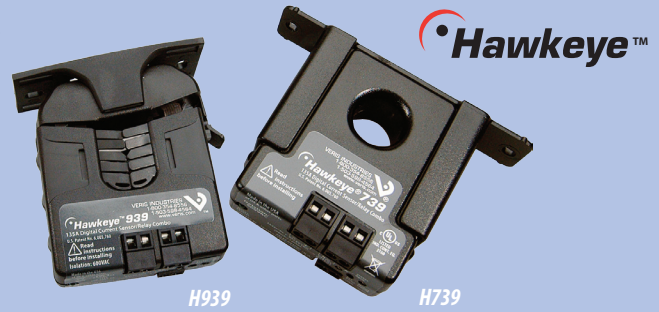

## DESCRIPTION

Hawkeye Relay Combination Series high voltage output current switches are the ideal solution for the automation installer. These units combine a current switch and relay into a single package, reducing the space required for total control of fans and pumps. The integrated current switch and relay operate independently of one another. All relay connections are externally available for maximum flexibility.


These products perform the functions of start/stop and status monitoring with one device instead of two.

## APPLICATIONS

- Starting/stopping and monitoring positive status of motors
- Detecting belt loss and coupling shear

## FEATURES

- Combines command relay & fan/pump status sensor in a single, easy to install unit
- Reduces number of components installed...fits better in small starter enclosures
- Command relay and status in a single unit
- Easier to install than differential pressure switches...no additional wiring needed
- Detect belt loss and motor failure...ideal for fan and pump status
- Bracket on H939, H949, and H959 can be installed in three different configurations...added flexibility
- H749 and H949 feature SPDT command relay...saves installation time
- Reduced charges from electrician
- Relay and status LEDs for easy setup
- Polarity insensitive status output...fast trouble-free installation
- Adjustable trip point for current sensor status...fits many applications
- 5-year warranty

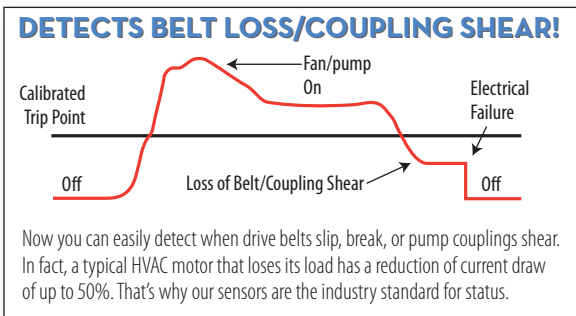

RELAY CONTACT RATINGS		
Hx39, Hx59 (SPST, N.O.)		
Resistive.....	10A@250VAC, 30VDC	
Inductive.....	5A@250VAC, 30VDC	
Hx49 (SPDT)		
Resistive.....	8A@250VAC, 30VDC	
Inductive.....	3.5A@250VAC, 30VDC	
TYPICAL COIL PERFORMANCE		
<b>Voltage</b>	<b>AC</b>	<b>DC</b>
24V.....	10mA	10mA
12V.....		20mA
<b>Pull In Voltage</b>		
Hx39 .....		20.1VDC
Hx49 .....		20.1VDC
Hx59 .....		8.4VDC
<b>Drop Out Voltage</b>		
Hx39 .....		5.2VDC
Hx49 .....		5.2VDC
Hx59 .....		3.0VDC


## SPECIFICATIONS




<b>Sensor Power</b>	Induced from monitored conductor
<b>Insulation Class</b>	600VAC RMS
<b>Frequency Range</b>	50/60 Hz
<b>Temperature Range</b>	-15° to 60°C (5° to 140°F)
<b>Humidity Range</b>	10-90% RH non-condensing
<b>Hysteresis</b>	10% Typical
<b>Terminal Block Wire Size</b>	24-14 AWG (0.2 to 2.1 mm <sup>2</sup> )
<b>Terminal Block Torque</b>	3.5 to 4.4 in-lbs (0.4 to 0.5 N-m)
<b>Agency Approvals</b>	UL 508 open device listing

Do not use the LED status indicators as evidence of applied voltage.

## DIMENSIONAL DRAWINGS

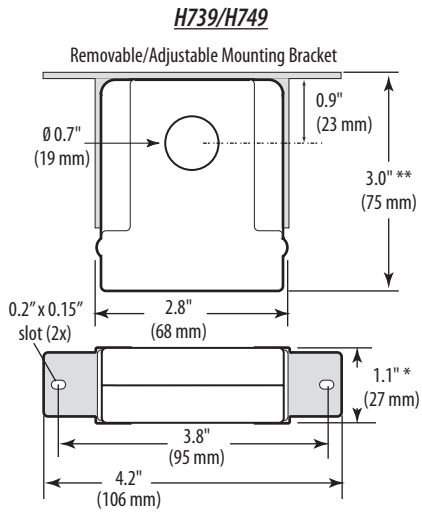


\* Terminal block may extend up to 1/8" over the height dimensions shown.

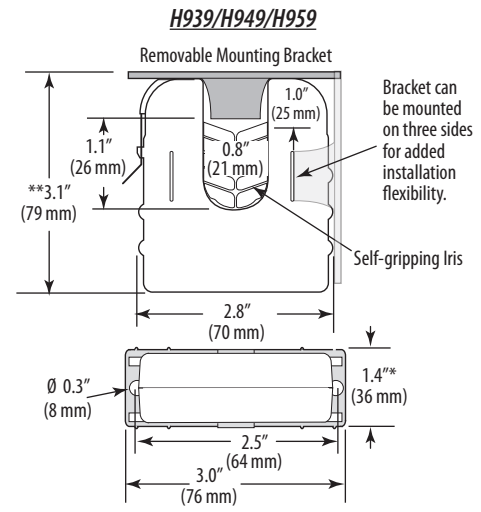


## APPLICATION/WIRING DIAGRAMS

### Start/Stop Monitoring of Fan / Pump Motors

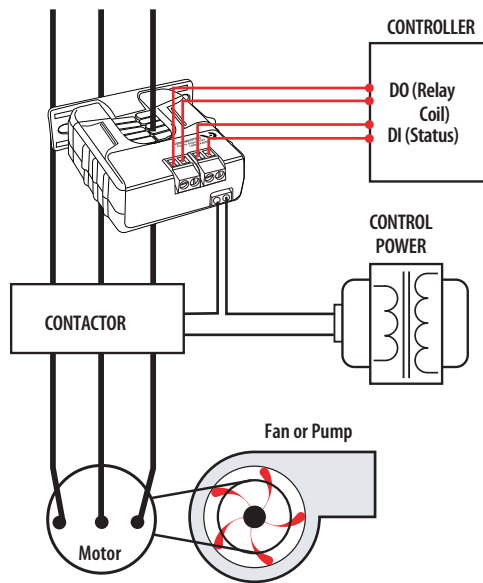

### Relay Controlled Directly by Status Contacts

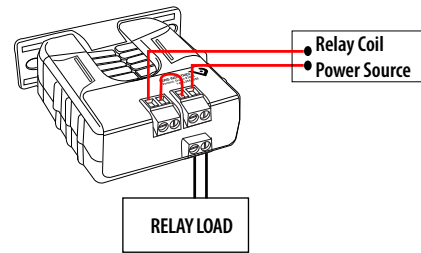

## ORDERING INFORMATION



MODEL	AMPERAGE RANGE	STATUS OUTPUT (max.)	MIN. TRIP POINT	RELAY TYPE	RELAY COIL	HOUSING	STATUS LED	RELAY POWER LED	UL
H739	1 - 135A	N.O. 0.2A@120VAC/DC	1A or less	SPST, N.O.	24VAC/DC	Solid-core	●	●	●
H749	1 - 135A		1A or less	SPDT	24VAC/DC	Solid-core	●	●	●
H939	2.5 - 135A		2.5A or less	SPST, N.O.	24VAC/DC	Split-core	●	●	●
H949	2.5 - 135A		2.5A or less	SPDT	24VAC/DC	Split-core	●	●	●
H959	2.5 - 135A		2.5A or less	SPST, N.O.	12VDC nom.	Split-core	●	●	●

## ACCESSORIES

DIN Rail Clip Set (AH01)

DIN Rail (AV01) and DIN Stop Clip (AV02)

