Model DLP-5.10
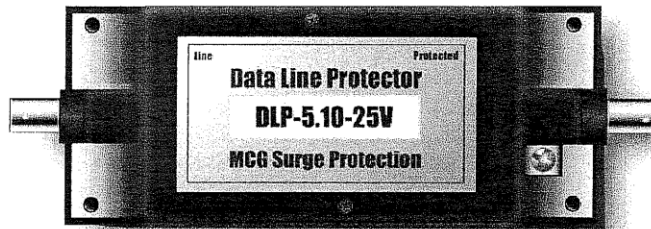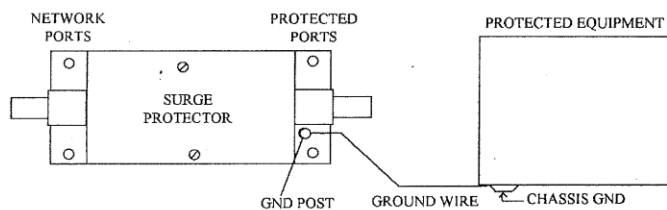
MCG Ethernet Surge Protector
Installation Instructions

For 10BASE-T, CCTV, Token Ring, I/O Ports Applications

To Install:

1. Disconnect data cable from equipment and plug into BNC jack network ports.
2. Install BNC patch cable between protector ports and equipment to be protected.
3. Connect green ground wire (supplied) from ground post on protector to chassis of equipment to be protected.
4. For indoor use only.
5. Surge protectors should be installed in pairs (protector at each end of cable run) to protect the equipment at each end of the data cable.

SENTINEL POWER INC.   Email: ken@sentinelpower.com

922 Middletown Rd, New Stanton, PA 15672   Toll Free: 1-800-784-7989