## **Data Line Protection**

MODEL

MODE

**DLP-3.92** 

DLP-C5

## **10BASE-T Protection**




Reliable protection, easy to install and a compact package make the DLP-3.92 an ideal protection choice. Designed for use on 10BASE-T networks, the unit will prevent costly downtime of sensitive networks by protecting NIC (network interface cards) hubs and relays. Units are virtually invisible to the network and will not affect data rates. The DLP-3.92 responds in nanoseconds to an overvoltage and instantly diverts harmful surge currents away from sensitive equipment. Units install in minutes.

## **100BASE-T Protection**



The DLP-C5 is designed for use on high speed Cat 5e networks. The DLP-C5 is perfect for use on 10/100BASE-T protocols or facilities using 10BASE-T but have a Cat 5 infrastructure for future upgrades to 100BASE-T (100 megabits per second) speed. Lowcost and easy to install, the DLP-C5 prevents equipment damage due to nearby lightning strikes and AC power surges which cause differences in ground potential. These events can easily wipe out unprotected ports in microseconds. Units install in minutes.

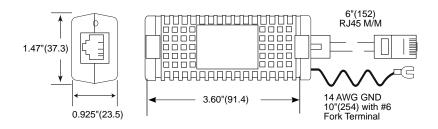

## SPECS

DLP-3.92-8 ALL 8 PINS Model: DLP-3.92-4 1,2,3 & 6 RJ45/RJ45 Protects: Connector: Enclosure: ABS Plastic, Pearl White Weight: <.14lbs., (<.06kg)

Peak Pulse Current: 132 AMPS, 10/1000µs

Std. Clamp Voltage: 7.5 VOLTS Response Time: UL: UL497B Listed

Warranty: 20 - year warranty

Model: DLP-C5 Connector: RJ45/RJ45 Protects: ALL 8 PINS

Enclosure: ABS Plastic, Pearl White Weight: <.14 lbs., (<.06kg)

Peak Pulse Current: 97 AMPS, 10/1000µs Std. Clamp Voltage: 12 VOLTS

Response Time: <5 ns UL: UL497B Listed Warranty: 20 - year warranty









922 Middletown Rd, New Stanton, PA 15672 USA - Phone: (724) 925-8181 - Fax: (724) 925-1764